
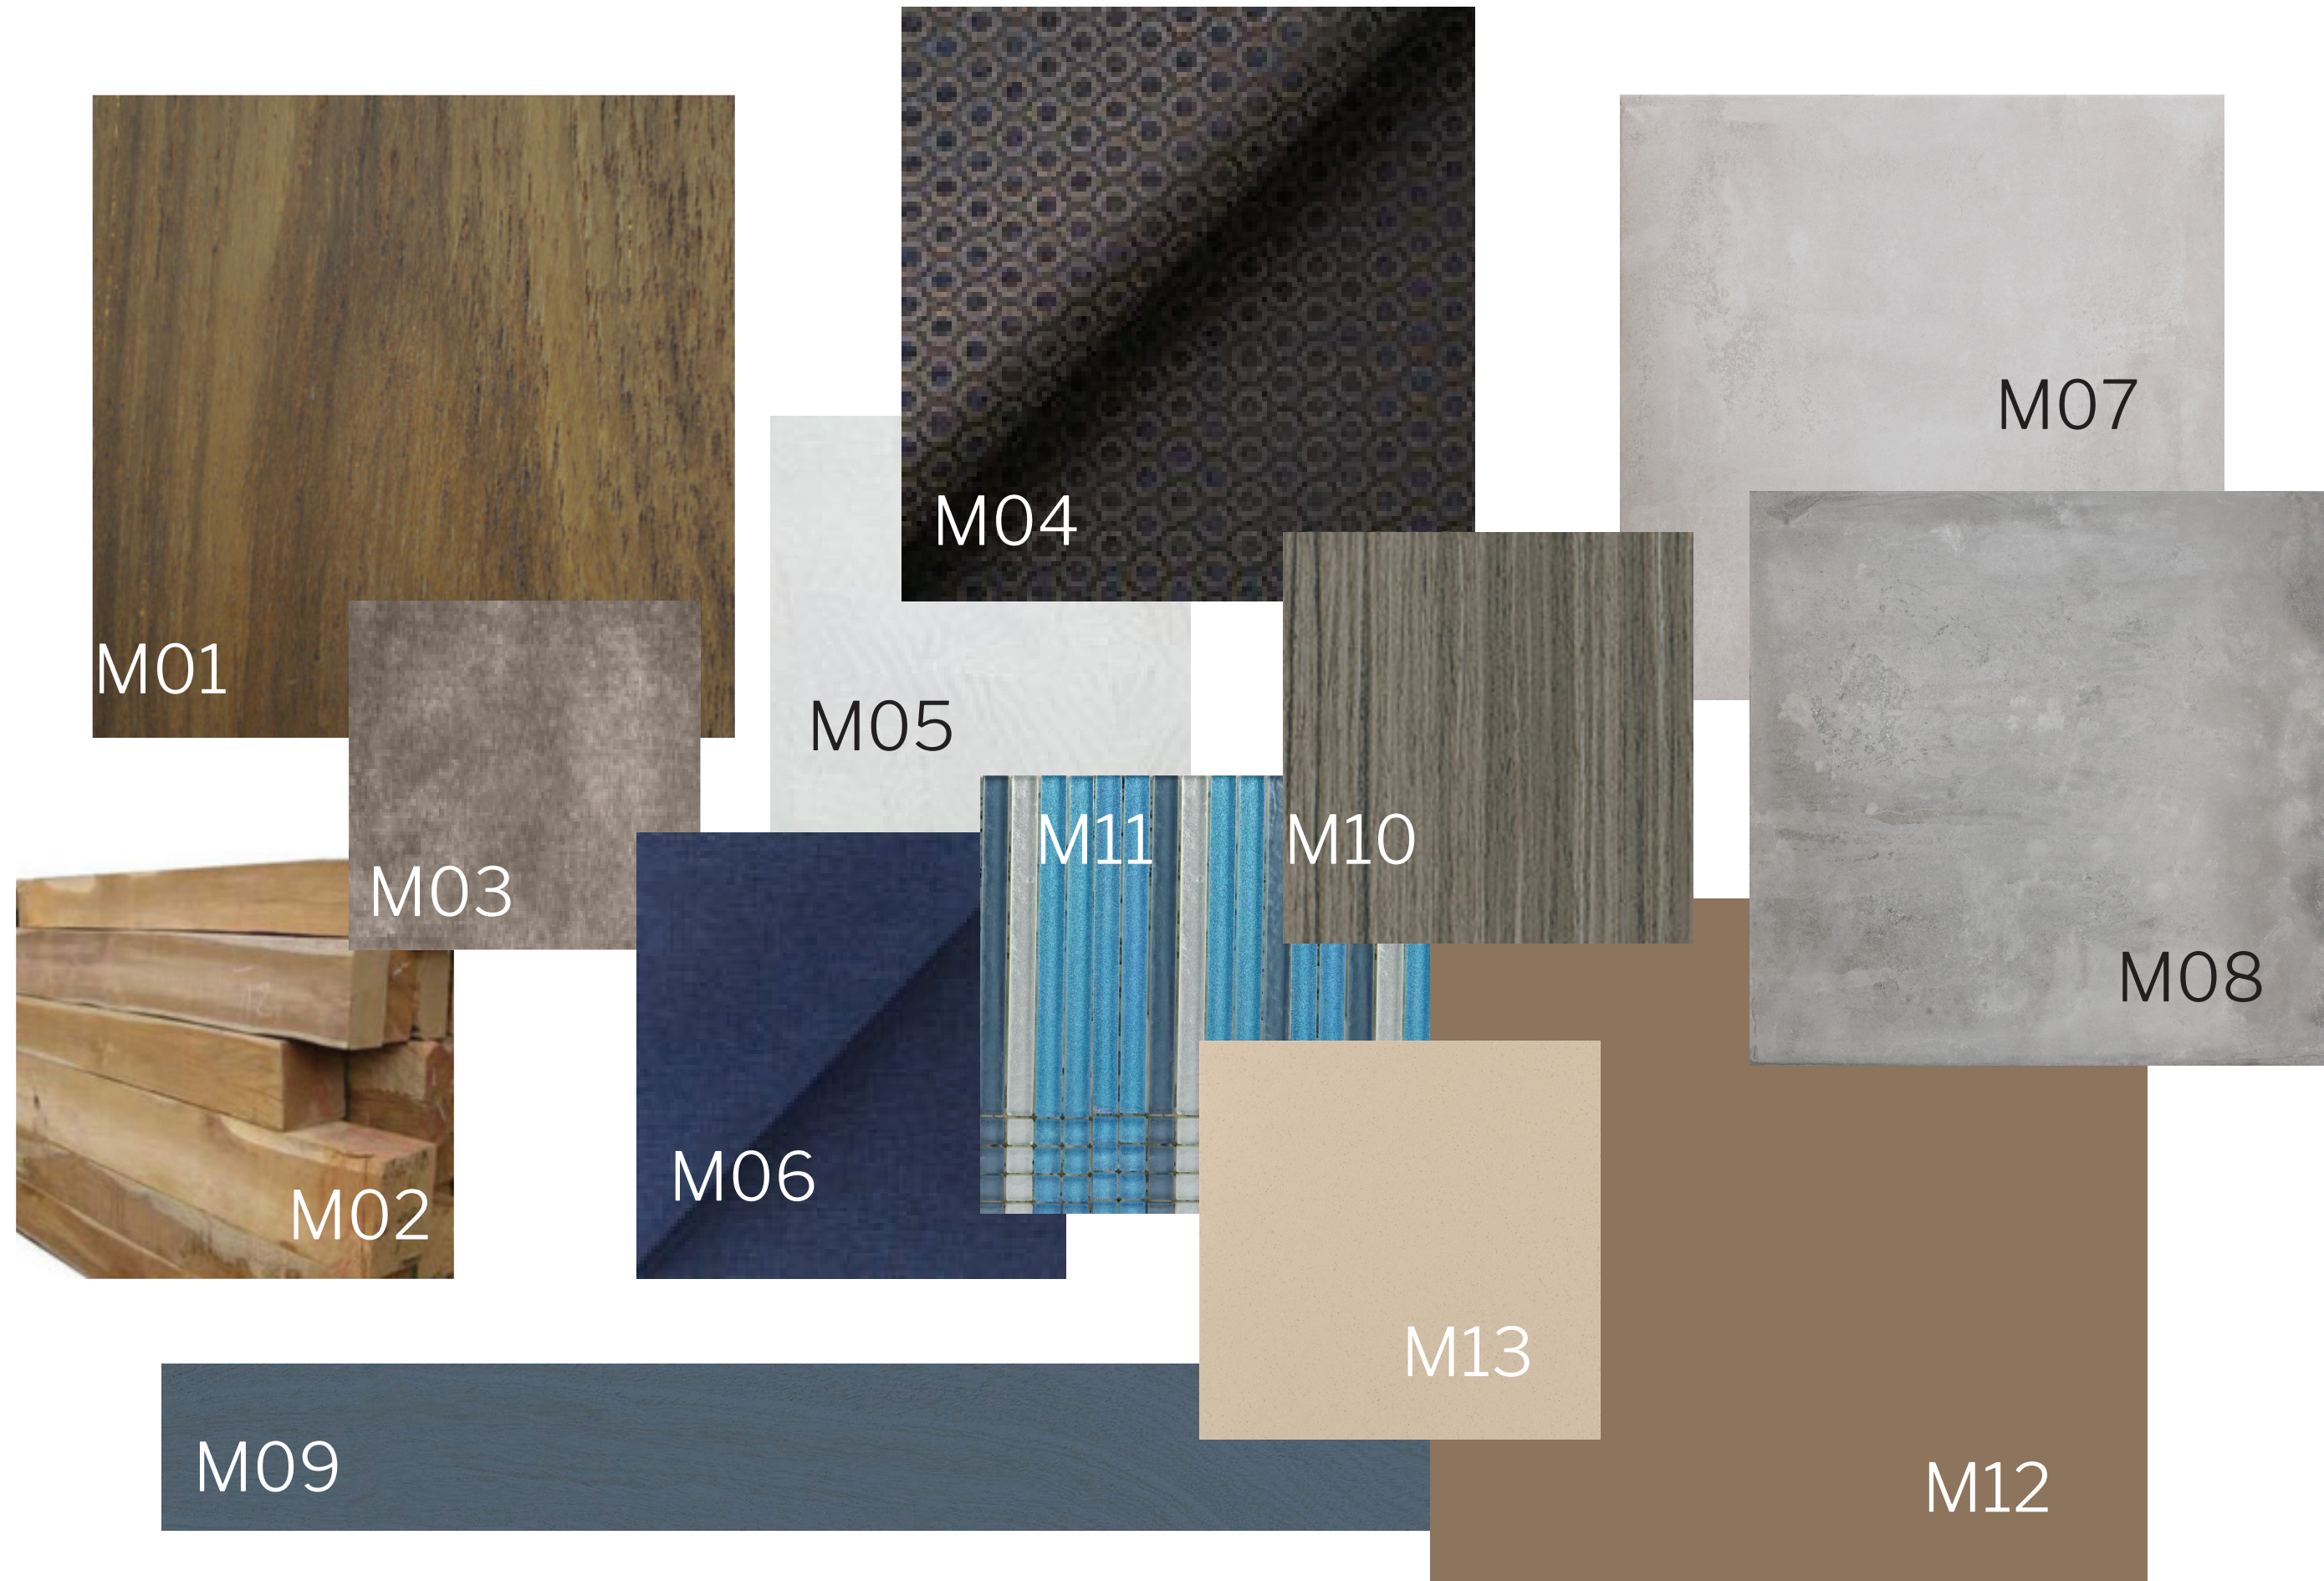



T5 – HOSPITALITY | Material Board & Schedules MATERIAL & TECHNOLOGY 2

CLASS 02 | 1740396 | HONG SI YU


Material board




SCHEDULES OF MATERIALS					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Deck	M01	Wooden Decking Clear Stain Teak	Dimension: 400mm[W] x 200mm[D]	Absolut Outdoors Pte Ltd 81 Ubi Ave 4, #05-19 UB.One Singapore 408830 Tel: +65 67498087 Fax: +65 65382800 Email: enquiry@absolutoutdoors.com	
Cladded to wall throughout otherwise stated	M02	Ghana Teak Wood	Dimension: 12 x 1.5" Thickness: 10mm Structure: Solid	Kaushik Karva Sy No. 44/4, Plot No.9, B.K. Enclave, Bachupally Road, Serilingampally, Miyapur Hyderabad- 500049, Telangana, India Tel: +91-8046048315	
Carpet in Living Room and Bedroom	M03	DIBBETS By Rodolfo Dordoni Carpet Colour: SABBIA SAND	Dimension: 3000mm[W], 3000mm[D] Surface Layer Thickness: 16mm Weight: 5,5 Kg/m2 Composition: 100% Lyocell® (a cellulose fi bre) Upper layer: Polyester Lower layer: Natural prevulcanized antiallergenic latex N.B.: initial 'shedding' is a common occurrence with natural fibers. (A slight variation in color may occur from dye lot to dye lot.)	Minotti Singapore by Marquis Interiors FLAGSHIP STORE 328 North Bridge Road #02-10/11/12/13 Raffles Hotel Arcade Singapore 188719 Tel: +65 6338 2822 Email: minotti@marquis.com.sg	
Curtain	M04	DIAMONDS IN WONDERLAND JIM THOMPSON Fabric Colour: JT013288021 (3288/21) CONGO BROWN	Width: 1420mm Martindale Rubs: 63,000 100% Cotton Type Of Repeat: Horizontal 28mm - Vertical 8mm Usage: Curtains, Upholstery	LUXE FURNISHINGS PTE. LTD. 402, Orchard Road, #01-08 Delfi Orchard, Singapore 238876 Tel: +(65) 6738 0768 Email: enquiry@luxefurnishings.com.sg	
Curtain	M05	SCALA CURTAIN CALLS JIM THOMPSON Fabric Colour: JT013426001 (3426/01) WHITE	Width: 3400mm [Wide width] 100% Trevira CS Type Of Repeat: Horizontal 850mm - Vertical 578m Usage: Curtains, Wide width, Fire Retardant		
Carpentry	M06	PALM PLAIN FEZ OUTDOOR NO.9 Fabric Colour: N9012122006 (2122/06) ROYAL BLUE	Width: 1370mm Martindale Rubs: 62,000-cool iron on the reversed side 100% Solution dyed polypropylene Usage: Upholstery, Outdoor		

SCHEDULES OF MATERIALS					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Bedroom floor	M07	Icon Silver Homogeneous Tile	Design: Stone Inspired Location: Wall/ Floor Produced by: Abitare Country: Italy 300 x 300 mm Matt Finish, R9	Toh Guan Concept Boutique 3A Toh Guan Road East Singapore 608834 Tel : 65641900 Fax : 65600450	
Study Area	M08	Icon Smoke Homogeneous Tile	Design: Stone Inspired Location: Wall/ Floor Produced by: Abitare Country: Italy 300 x 300 mm Matt Finish, R9		
Study Area	M09	41ZERO42 TECHNICOLOR TC17 Glazed Porcelain Tile	Dimension: 375mm[W], 50 mm[D] Variation: Shade and Veins Variation (V1) Location: Wall/ Floor Country: Italy	Hafary Gallery 105 Eunos Avenue 3 Singapore 409836 Tel: +65 6250 1368 Fax: +65 6383 1536 Email: eunosshowroom@hafary.com.sg	
Carpentry [Study table, Bedside table]	M10	WY 1242X Cool Java Teak Laminte	Shades: Dark Type: Teak Finish: Textured Grains: Straight Newedge code: EAW1242E1 Newedge size: W23	TAK PRODUCTS & SERVICES PTE LTD 41 Sungei Kadut Avenue Singapore 729665 Tel: +65 6366 1212 Fax: +65 6411 9182 Email: sales.dept@tak.com.sg	
Swimming Pool Wall & Floor	M11	BLRGS003 Mosaic Tile	Location: Wall/ Floor Country: China 300 x 300 mm Glossy Finish	Toh Guan Concept Boutique 3A Toh Guan Road East Singapore 608834 Tel : 65641900 Fax : 65600450	
Wall in Bedroom, study area, walk-in wardrobe	M12	41563 Nippon Paint Odour-less All-in-1 Colour: NP N 1863 D (Morsels)	Volume: 5L Type: Modified Acrylic Polymer Emulsion for interior use Finish: Classic matt Application Method: Roller or brush Dilution: No dilution is necessary for best performance Surface Dry: 30 minutes at 30°C Hard Dry: 2 hours at 30°C Overcoating Time: 2 hours based on normal conditions Storage: Store in a tightly sealed container in a cool, dry place Shelf Life: Up to 24 months in a tightly sealed container	Nippon Paint Singapore Co. Pte Ltd 1, First Lok Yang Road Jurong Singapore 629728 Tel: +65 6265 5355	
Washroom room countertop	M13	SP 474 Sanded Papyrus Solid Surface	Dimension: 3680mm[W], 760mm[D], 12mm[H]	Evershine 19 Gul Way Singapore 629195 Tel: +65 6897 8888 Fax: +65 6897 8128	

SCHEDULE OF FURNITURE					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Living Room	F01	Sofa With Arms By Shiro Kuramata Chair Finishes: Pelle Extra/Leather Extra [984]	Dimension: 620mm[W], 900mm[D], 650mm[H] 380mm[Seat Height] Structure: Chromed metal tube with seat in poplar plywood and back in massive fir and medium density wooden conglomerate parts Padding: Multi-density polyurethane foam, with cover fixed in fabric, leather G or Extra G2 Feet: White plastic	Cappellini Milano Via Santa Cecilia 4 20122 - Milano(MI) Italy Tel: 02 76003889 Fax: 02 76003676 Email: s.Cecila@cappellini.It Website: www.Cappellini.It	
Living Room	F02	HF_1W HI FI By Studio Cappellini Console table Finishes: 187 Teak, 1059	Dimension: 3640mm[W], 470mm[D] 700mm[H] Case/Panels made of wood particles veneered melamine Door and Shelves Panels made of wood particles veneered melamine finishes Case Drawer fronts in panels mix of medium density fiberboard veneered with melamine finishes the case. Feet: Height-adjustable metal with black plastic cap		
Living Room	F03	381 TOREI By Luca Nichetto Sofa Finishes: 13F367 BONATTI	202 12 - Divano 2 posti non utilizzabile individualmente SX: 1630mm[W] X 880mm[D] X 78mm[H] 410mm[seating height] 202 13 - Divano 2 posti non utilizzabile individualmente DX 1630mm[W] X 880mm[D] X 78mm[H] 410mm[seating height]	Cassina Corner SPACE FURNITURE PTE LTD. 77 Bencoolen Street Singapore 189653 Tel: 0065 6415 0000 Email: info@spacefurniture.com.sg	
Living Room	F04	381 TOREI By Luca Nichetto Coffee table Finishes: NOCE CANALETTO / AMERICAN WALNUT	381 14/24/C4/L4 1200mm[W] X 220mm[D] X 410mm[H] Rectangle table 381 81/91/L5 390mm Ø X 510mm[H] Circle table 381 61/71 610mm[W] X 610mm[D] X 310mm[H] Triangle table		
Living Room	F05	UA82NU8000KXXS Samsung 82" Premium UHD 4K Smart TV NU8000 Series 8 TV	Dimension: 1830mm[W], 60.9mm[D], 1054mm[H] 45.70 kg Screen Size: 82" Resolution: 3,840 x 2,160 HDR Elite UHD Engine Picture Quality Index[PQI]: 2500 2 USB, 4 HDMI Power Supply: AC100-240V 50/60Hz Power Consumption (Max): 300 W	Audio House 72 Bendemeer Rd #01-20/21/22 Singapore 339941 Tel: 6841 2122 Email: shop@audiohouse.com.sg	
Outdoor Dining Area	F06	1966-46H 1966 Dining Armless Chair Richard Schultz 1966 Outdoor Dining Chair Finishes: White with White Mesh & Strap	Dimension: 19"[W], 24.25"[D], 31"[H], 18"[Seating Height] Seat and back are woven vinyl coated polyester mesh Straps are solid pure vinyl with no fillers and sewn onto the mesh seat and back with teflon thread Frame is welded cast and extruded aluminum finished in weather resistant polyester powder coat Stainless steel supports and connectors Glides included GREENGUARD Indoor Air Quality Certified®	MTM Solutions Workplace Dealers 85 Playfair Road 01-01 & 02-01 Tong Yuan Building Singapore 368000 Tel: +65 6438-0692 Email: mark.moore@mtmsolution.com	
Outdoor Dining Area	F07	35" Round Dining Table Eero Saarinen 1957 Outdoor Dining Table Finishes: Base Color-White Top-Vetro Bianco	Dimension: 35.75"[Diameter], 28.25"[H] Tabletop: Non-porous, stain-proof, and extremely durable, making it suitable for indoor and outdoor use;beveled edge Slate: 0.75" thick; natural cleft slate surface; beveled edge Top attaches to base with all stainless steel hardware Base is heavy molded cast aluminum with abrasion resistant black or white Rilsan finish GREENGUARD Indoor Air Quality Certified®		

SCHEDULE OF FURNITURE					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Bedroom	F08	UA55NU8000KXXS Samsung 55" Premium UHD 4K Smart TV NU8000 Series 8 TV	Dimension: 1227.1mm[W] x 54.9 mm[D], 710.7mm[H] 17.1 kg Screen Size: 55" Installation: Wall-mount Resolution: 3,840 x 2,160 HDR Elite UHD Engine Picture Quality Index[PQI]: 2500 2 USB, 4 HDMI Power Supply: AC100-240V 50/60Hz Power Consumption (Max): 300 W	Audio House 72 Bendemeer Rd #01-20/21/22 Singapore 339941 Tel: 6841 2122 Email: shop@audiohouse.com.sg	
Bedroom	F09	SUPEROBLONG BED SB_170 By Jasper Morrison Bed Finishes: GRIT 08, GRIT 26	Dimension: 1840mm[W], 2350mm[D], 300mm[H] Structure: Metal, poplar plywood and medium-density fibre panels Padding: Multi-density polyurethane foam, fibre and feather, with cover removable in fabric Hinges: Black Feet: Adjustable central feet in black varnished metal Fixed bedstead: Beech plywood with slats	Cappellini Milano Via Santa Cecilia 4 20122 - Milano(MI) Italy Tel: 02 76003889 Fax: 02 76003676 Email: s.Cecila@cappellini.It Website: www.Cappellini.It	
Bedroom	F10	GAJA W58 02 By Kazuhide Takahama Chair Finishes: BIG BANG 13E814	Dimension: 510mm[W], 460mm[D], 670mm[H], 460mm[Seating Height] Chair with resistance welded chrome plated steel bar frame and removable cove	Cassina Corner SPACE FURNITURE PTE LTD. 77 Bencoolen Street Singapore 189653 Tel: 0065 6415 0000 Email: info@spacefurniture.com.sg	
Bedroom	F11	Eracle ARC6 Maxalto Collection Wardrobe Finishes: Natural wenge, Bronze nickel painted, Transparent glass with bronzed metallic fabric, Coloniale leather melamine faced	Dimension: 2100mm[W], 635mm[D], 2200mm[H]	SPACE FURNITURE PTE LTD 77 Bencoolen Street Singapore 189653 Tel. 6415 0000 Fax: 6415 0100 Email: info@spacefurniture.com.sg Website: www.spacefurniture.com	
Living Room	F12	Symbio Ceiling Fan MAF522487 By Minka Aire Fans Ceiling Fan Finishes: Oil Rubbed Bronze with Medium Maple Blades	56" Blade sweep Installation Type: With Downrod Etched opal LED kit Includes special hand held remote control system Blade Pitch: 13 degrees Motor Type: DC Motor Fan Speeds Forward/Reverse: 6 Control Included: Handheld with wall bracket Power: 16 W Lumen: 1352 lm Integrated LED: CRI: 80 Colour Temperature: 2700K	Lumens Light + Living Monday – Friday 6am to 5pm Pacific Saturday 7am to 3:30pm Pacific Tel: 877.554.1272 Fax: 916.444.5885 Website: www.lumens.com	
Living Room	F13	3/4 Inch Diameter Downrod R112048 By Minka Aire Fans Downrod Finishes: Illuminati Bronze	Dimension: 0.75" Ø, 72" [H]		

SCHEDULES OF LIGHTING					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Living Room, Bedroom, Walk-in wardrobe, Washroom, Bathroom	L01	84056.000 Compact Recessed luminaires Double wallwashers Recessed light	Light distribution: Double wallwash Optical cut-off: 0° LED Power: 24W LED Lumen: 2520 lm Construction size: 5 Covered switchable	ERCO Lighting Pte. Ltd. 93 Havelock Road #03-532 Singapore 160093 Tel:: +65 6227 3768 Fax: +65 6227 8768 Email: info.sg@erco.com	 
		84057.000 Compact Recessed luminaires Double wallwashers Recessed light	Light distribution: Double wallwash Optical cut-off: 0° LED Power: 24W LED Lumen: 3300 lm Construction size: 5 Covered switchable		
Cove lighting at living room & Bedroom	L02	31059/31/66 Philips Linea Wall light LED Strip Material: Synthetics Colour: White	Dimension: 365mm[W], 445mm[D], 270mm[H] Weight: 0.180 kg 31059 LED tape 3000K Wattage bulb: 18W Class of protection: III - safe extra low voltage	Kum Eng Huat Electric Co Pte Ltd No. 4 Kaki Bukit Place, Eunos Techpark Singapore 416182 Tel: +65 6842 1818 Fax: 6841 2828 Email: enquiry@kumenghuat.com.sg	
Study Area	L03	Mayfair Pendant Light 5525 Pendant Light Finshes: 18 Matt graphite lacquer	Dimension: 300mm Ø, 480-2000mm[H] Gross weight 3.6. / Net weight 3.24. Installation type: Surface Shade: Polycarbonate diffuser Ceiling rose: Steel Shade: Steel Vertical tube material: Steel Diffuser: material Polycarbonate 1 × LED STRIP 24V 12,6W Led 2700K CRI >80 1841 lm 96 lm/W Fixture 417 lm 0 lm/W Driver included: CC - Constant Current 220-240V 50/60Hz	Vibia C/ Progrés 4-6 08850 - Gavà Barcelona, España Tel: +34 934 796 971 Email: international@vibialighting.com	
Bedroom	L04	Quadra Ice Wall 1138 Wall-mounted indoor light Finshes: 00 White glass RAL 9016	Dimension: 420mm[W], 80mm[D], 300mm[H] Gross weight 2.3. / Net weight 2.07. Installation type: Surface Shade: Optical-glass diffuser Diffuser: Glass 1 × R7s 80mm 230V 120W Eco Fixture 1711 lm 14 lm/W Driver included: CV - Contant Voltage 230V 50Hz		
Outdoor	L05	Break 4110 By Xucla & Alemany Wall-mounted outdoor light Finishes: 07 Khaki lacquer RAL 7006	Dimension: 110mm[W] X 50-80mm [D] X 120mm[H] Gross weight 0.8. / Net weight 0.72. Shade: Methacrylate diffuses Head material: Aluminium Diffuser material: Methacrylate 1 × LED2,1W 700mA Led 2700K CRI >80 199 lm 95 lm/W Fixture 22 lm 10 lm/W Driver included: CC - Constant Current 700 mA 100-240V 50/60Hz Electronic dimming NO DIM		
Outdoor	L06	Boxes Outdoor Floor 4600 Floor-Mounted outdoor light Finishes: 07 Matt Khaki lacquer RAL 7006	Dimension: 300mm[W] X 70mm [D] X 600mm[H] Gross weight 9.1. / Net weight 8.19. Shade: Sandblasted pressed glass Box material: Steel Head material: Aluminium Diffuser material: Glass 1 × HCl G8,5 230V 20W Fixture: 424 lm 21 lm/W Driver included: CV - Contant Voltage 230V 50Hz		

SCHEDULE OF SANITARY FITTINGS & ACCESSORIES					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Washroom	S01	3413210041111 Bidet mixer, projection 87 mm, fixed spout, with pop-up waste TWINPRIME Collection Finishes: Chrome	Dimension: 570 mm[L], 250 mm[W], 85 mm[H] Application: Bidet low rate (l/min - 3 bar): 4.9 Installation type: Deck-mounted Spout length (mm): 87 Spout position: Central Type of cartridge: Ceramic Disc Water connection diameter: 3/8"	LAUFEN BATHROOMS AG Wahlenstrasse 46 CH-4242 Laufen Tel: +41 61 765 71 11 Email: feedback@laufen.ch	
Washroom	S02	830801 Wall-hung bidet PALOMBA COLLECTION Finishes: 400 White with LCC (LAUFEN Clean Coat)	Dimension: 540 mm[L], 360 mm[W], 265 mm[H] Back-to-wall Installation type: Wall-hung 1 centre tap hole Concealed fixation Mounting accessories included: Wall fixing set M12 LAUFEN, order no. 89280.4 Mounting accessories excluded: Stone screw fixing set M12		
Washroom	S03	231302 Freestanding bathtub INO Collection Finishes: 000 White Sentec solid surface	Dimension: 1700 mm[L], 750 mm[W], 455 mm[H] Installation type: Freestanding Installation structure: With feet 105 Kg With overflow slot incl. click-clack waste and chrome cover Charge 000 – without whirl system		
Washroom	S04	3219570041381 Wall-mounted single lever bath mixer 'liberty', with 2-way diverter, with accessories CITYPRO Collection Finishes: Chrome	Maximum width between connections (mm): 166 Spout length: 182mm Type of cartridge: Ceramic Disc Cartridge features: Flow limiter, Temperature limiter Aerator type: Laminar Application: Bath Installation type: Wall-mounted Minimum width between connections: 134mm Spout position: Central Water connection diameter: 1/2" - 3/4"		
Washroom	S05	824331 Floorstanding WC 'rimless', close- coupled, washdown, without flushing rim KARTELL BY LAUFEN Collection Finishes: 000 White	Dimension: 660 mm[L], 370 mm[W], 440 mm[H] Back-to-wall Installation type: Floor-standing Rim type: Rimless Compact toilet Flushing system: Washdown Outlet type: Dual 33.5 Kg Mounting accessories included: Fixing set, order no. 891757 Mounting accessories excluded: for VARIO-outlet 70 - 205 mm LAUFENconnection, order no. 890092		
Washroom	S06	384685 Combo crystal soap dispenser and glass, wall-mounted LB3 Collection Finishes: 004 Chromed	Dimension: 250 mm[L], 160 mm[W], 150 mm[H] 2 Kg		
Washroom	S07	384685 Combo crystal soap dispenser and glass, wall-mounted LB3 Collection Finishes: 004 Chromed	Dimension: 94 mm[L], 55 mm[W], 495 mm[H] 0.6 Kg		


SCHEDULE OF SANITARY FITTINGS & ACCESSORIES

LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Washroom	S08	490952 Towel holder for furniture, 400 mm CASE Collection Finishes: 104 Anodised aluminium	Dimension: 400 mm[L], 60 mm[W], 15 mm[H] F000 standard option 0.37 Kg	LAUFEN BATHROOMS AG Wahlenstrasse 46 CH-4242 Laufen Tel: +41 61 765 71 11 Email: feedback@laufen.ch	
Washroom	S09	009926 D-Code Paper holder Design by Duravit Finishes: Chrome	Dimension: 165mm[L], 66mm[W], 100mm[H] Variants: 0099261000 0.4kg	Ferrara Asiapac Pte Ltd 39A Jalan Pemimpin #05-01 Halcyon Building Singapore 577183 Phone: +65 6256 2911 Fax: +65 6259 7358 Website: www.ferrara.com.sg	
Washroom	S10	K-77974-4-CP Bathroom sink handles with Lever design Components™ Finishes: Polished Chrome	Dimension: 6-5/8"[L], 2-3/8"[W], 14-1/8"[H] Installation: For 8" (203 mm), widespread Handles pre-assembled on valves	KOHLER SHOWROOM IN BATHROOM WAREHOUSE (TRADEHUB 21) 18@ TradeHub 21, 18 Boon Lay Way, #01-98A/111 Singapore 609966	
Washroom	S11	K-77966-CP Tall bathroom sink spout with Ribbon design Components™ Finishes: Polished Chrome	Dimension: 6-5/8"[L], 2-3/8"[W], 14-1/8"[H] Installation: For 8" (203 mm), widespread Includes metal touch-activated drain with 1-1/4" tailpiece. Flow rate: 1.2 gal/min (4.5 l/min) Pressure: 60 psi (4.1 bar) Spout reach: 6-11/16" (170 mm)		
Washroom	S12	K-20704-N-0 vessel bathroom sink without overflow Veil® Collection Finishes: White	Dimension: 20-13/16"[L], 13-13/16"[W], 8"[H] Asymmetrical oval basin. No faucet holes; requires wall- or counter-mount faucet. Includes color-matched brass drain cover. Fireclay with Supramic technology. Installation: Vessel Drain hole: 1-3/4" (44 mm) Template: 1317551-7, not required, included Connect with K-9018 P-Trap		
Washroom	S13	K-9018-CP Adjustable P-trap with long tubing outlet Finishes: White	Dimension: 14-1/2"[L], 4-3/8"[H] Material: Brass Installation: Intended for console table installations. Adjustable rotation on outlet extension tube. Slip-fit inlet. Cleanout plug. Flange		
Living Room (Bevrag e making area)	S14	K-6565-96 18-3/8" diameter x 8-5/16" top-/under- mount bar sink Porto Fino™ Finishes: Biscuit	Dimension: 18-3/8"[Diameter], 8-5/8"[H] Bowl configuration: Single Installation: Under-mount Min. base cabinet width: 21" (533 mm) Bowl area (Only): Drain hole: 3-5/8" (92 mm) Template: 112355-7, required, included		
Washroom	S15	K-8801-CP Sink drain and strainer with tailpiece Duostrainer® Finishes: Polished Chrome	Dimension: 4-1/2"[W], 7"[H] For sink installations with 3-1/2" (89 mm) or 4" (102 mm) outlet. Removable basket strainer with open/close stopper. Tailpiece included.		

SCHEDULE OF SANITARY FITTINGS & ACCESSORIES					
LOCATION	CODE	ITEM	SPECIFICATION	SUPPLIER	IMAGE
Washroom	S15	K-72218-CP Touchless kitchen faucet with 15-1/2" pull-down spout, DockNetik® magnetic docking system and a 2-function sprayhead featuring the new Sweep® spray Sensate® Finishes: Polished Chrome	Dimension: 10-7/16"[L], 15-1/2"[H], 3-3/4"[W] Spout reach: 8-7/16" (214 mm) Flow rate: 1.5 gal/min (5.7 l/min) Pressure: 60 psi (4.1 bar) Power source: Plug - AC, included Single-hole installation. Flexible supply lines simplify installation.	KOHLER SHOWROOM IN BATHROOM WAREHOUSE (TRADEHUB 21) 18@ TradeHub 21, 18 Boon Lay Way, #01-98A/111 Singapore 60996	
Washroom	S16	27133400 Raindance Select S Showerpipe 300 2jet with thermostat Finishes: Chrome	Shower head size: 300 mm Shower arm length: 460 mm Consists of: overhead shower, hand shower, shower thermostat, shower hose, slider Spray type: RainAir, Rain Maximum flow rate at 0.3 MPa: 15 l/min Operating pressure: min. 0.15 MPa/max. 1.0 MPa Centre distance 150 ± 12 mm Height-adjustable hand shower holder Suitable for continuous flow water heaters with an output of 18kW	Home & Bathroom Building Products Pte Ltd 566 Balestier Road Singapore 329883 Tel : +65 6253 4655	

T6 – HOSPITALITY CONSTRUCTION DRAWINGS MATERIAL & TECHNOLOGY 2

CLASS 02 | 1740396 | HONG SI YU

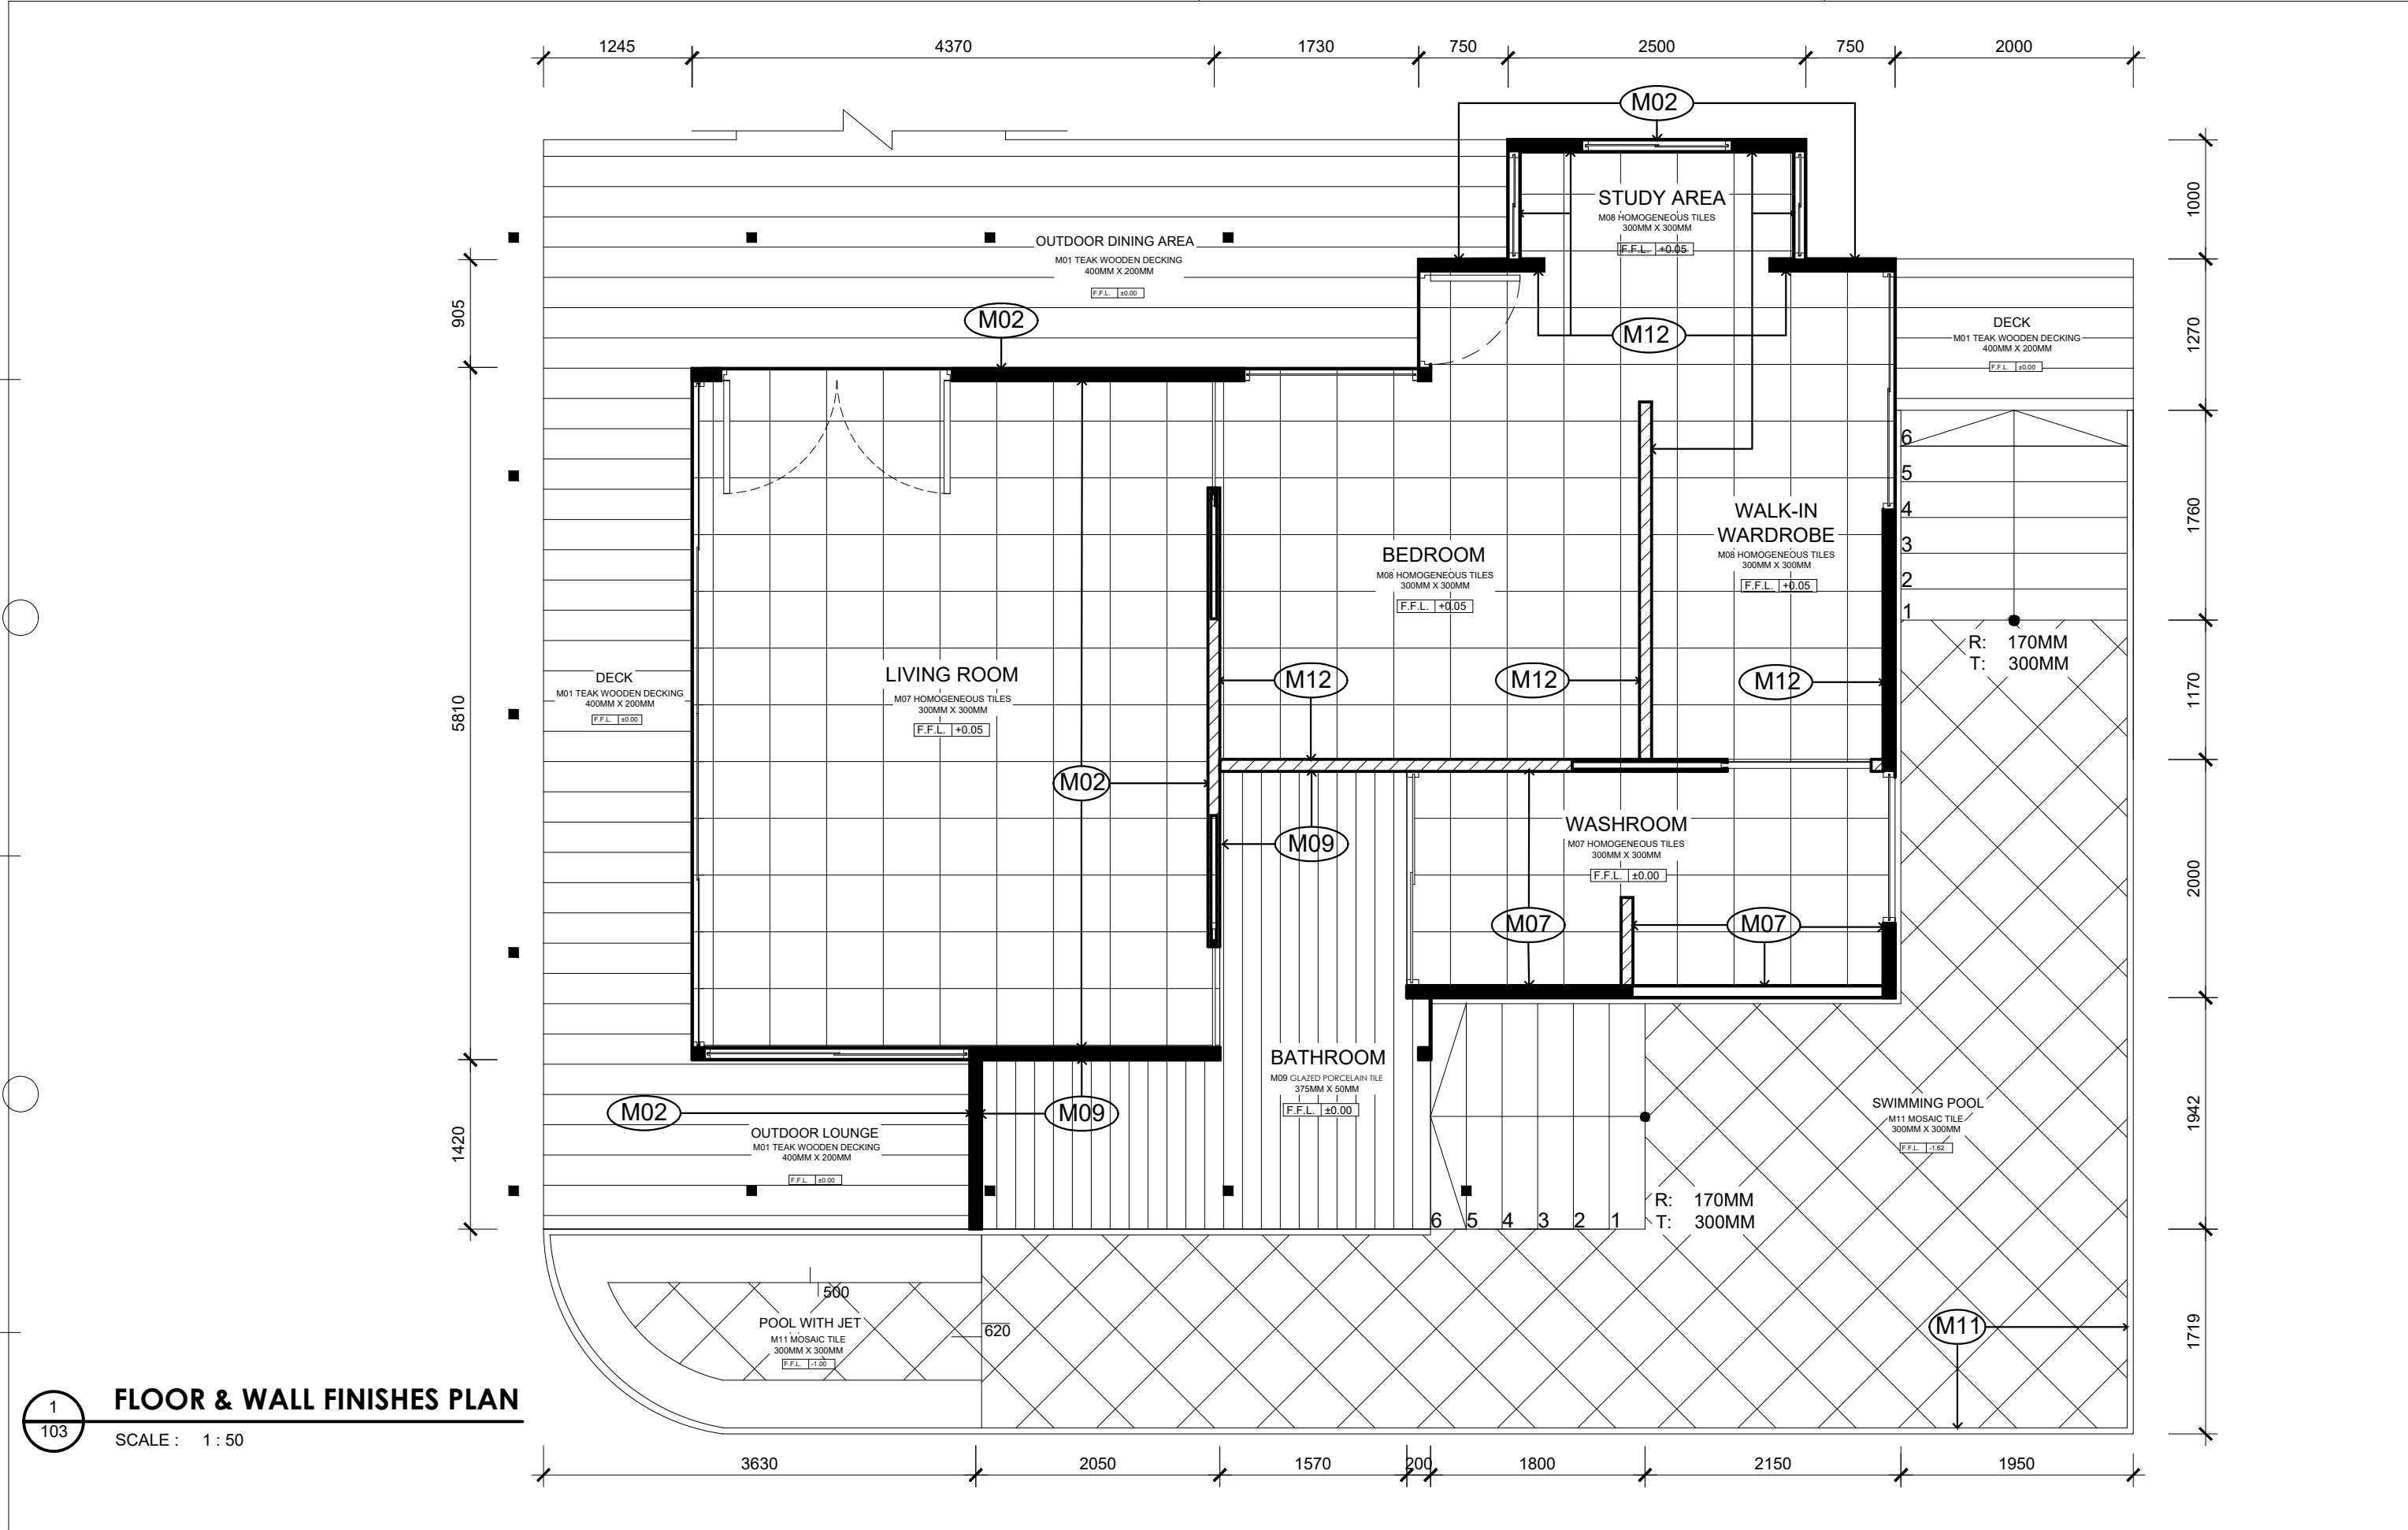

1
103

FLOOR & WALL FINISHES PLAN

SCALE : 1 : 50

SP

DESIGN
SCHOOL

Project Description :
MATERIAL & TECHNOLOGY 2
T6 – HOSPITALITY
CONSTRUCTION DRAWINGS

Project Code :
2019-0001

Date Issued:
18/01/2019

Project No. :
2019-0001

Scale
1 : 50

Drawn:
Hong Si Yu


Checked:
SP Design

Drawing Title :
Floor & Wall Finishes Plan


Drawing No. :
FLOOR & WALL FINISHES
PLAN


Revision:



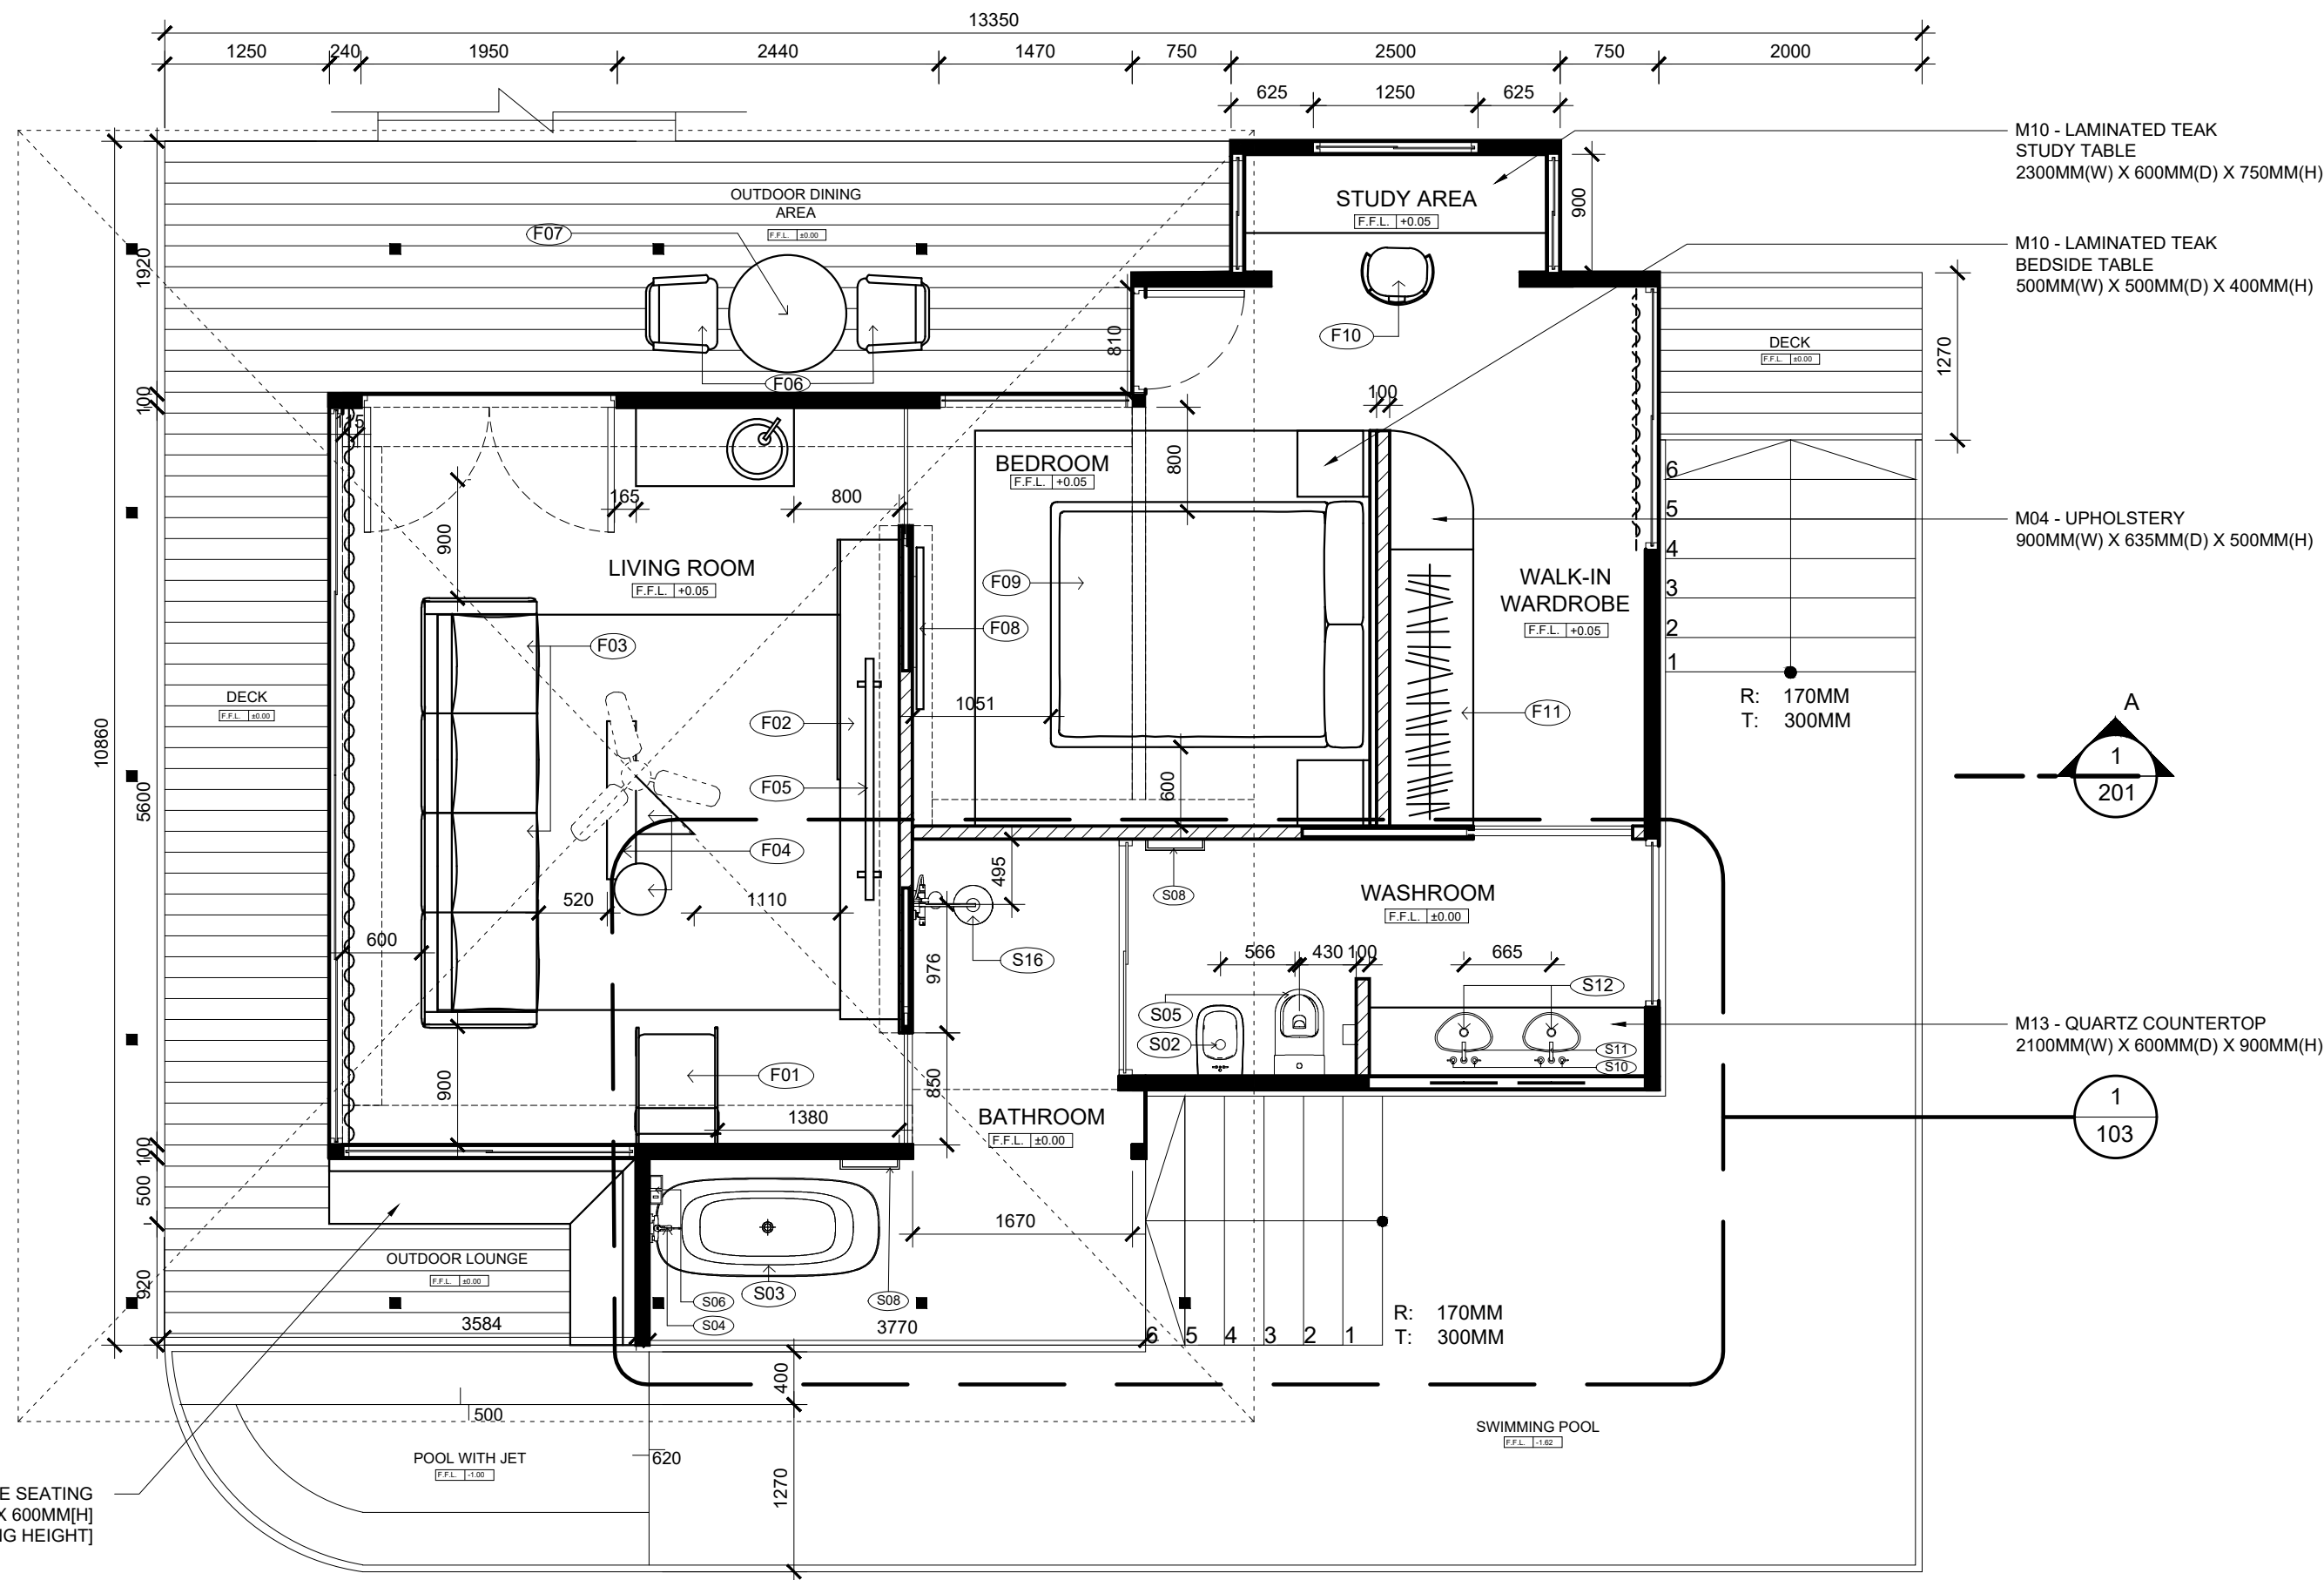


1
102 FURNITURE LAYOUT PLAN
SCALE : 1 : 50

LEGEND	
	OUTDOOR WALL MOUNTED LIGHT L05
	RECESSED LIGHT L01
	PENDANT LIGHT L03
	MOTION SENSOR OUTDOOR LIGHT L06
	MOTION SENSOR LIGHT
	WIRE
	ONE GANG DOUBLE - POLE LIGHTING SWITCH
	ONE GANG SINGLE - POLE LIGHTING SWITCH

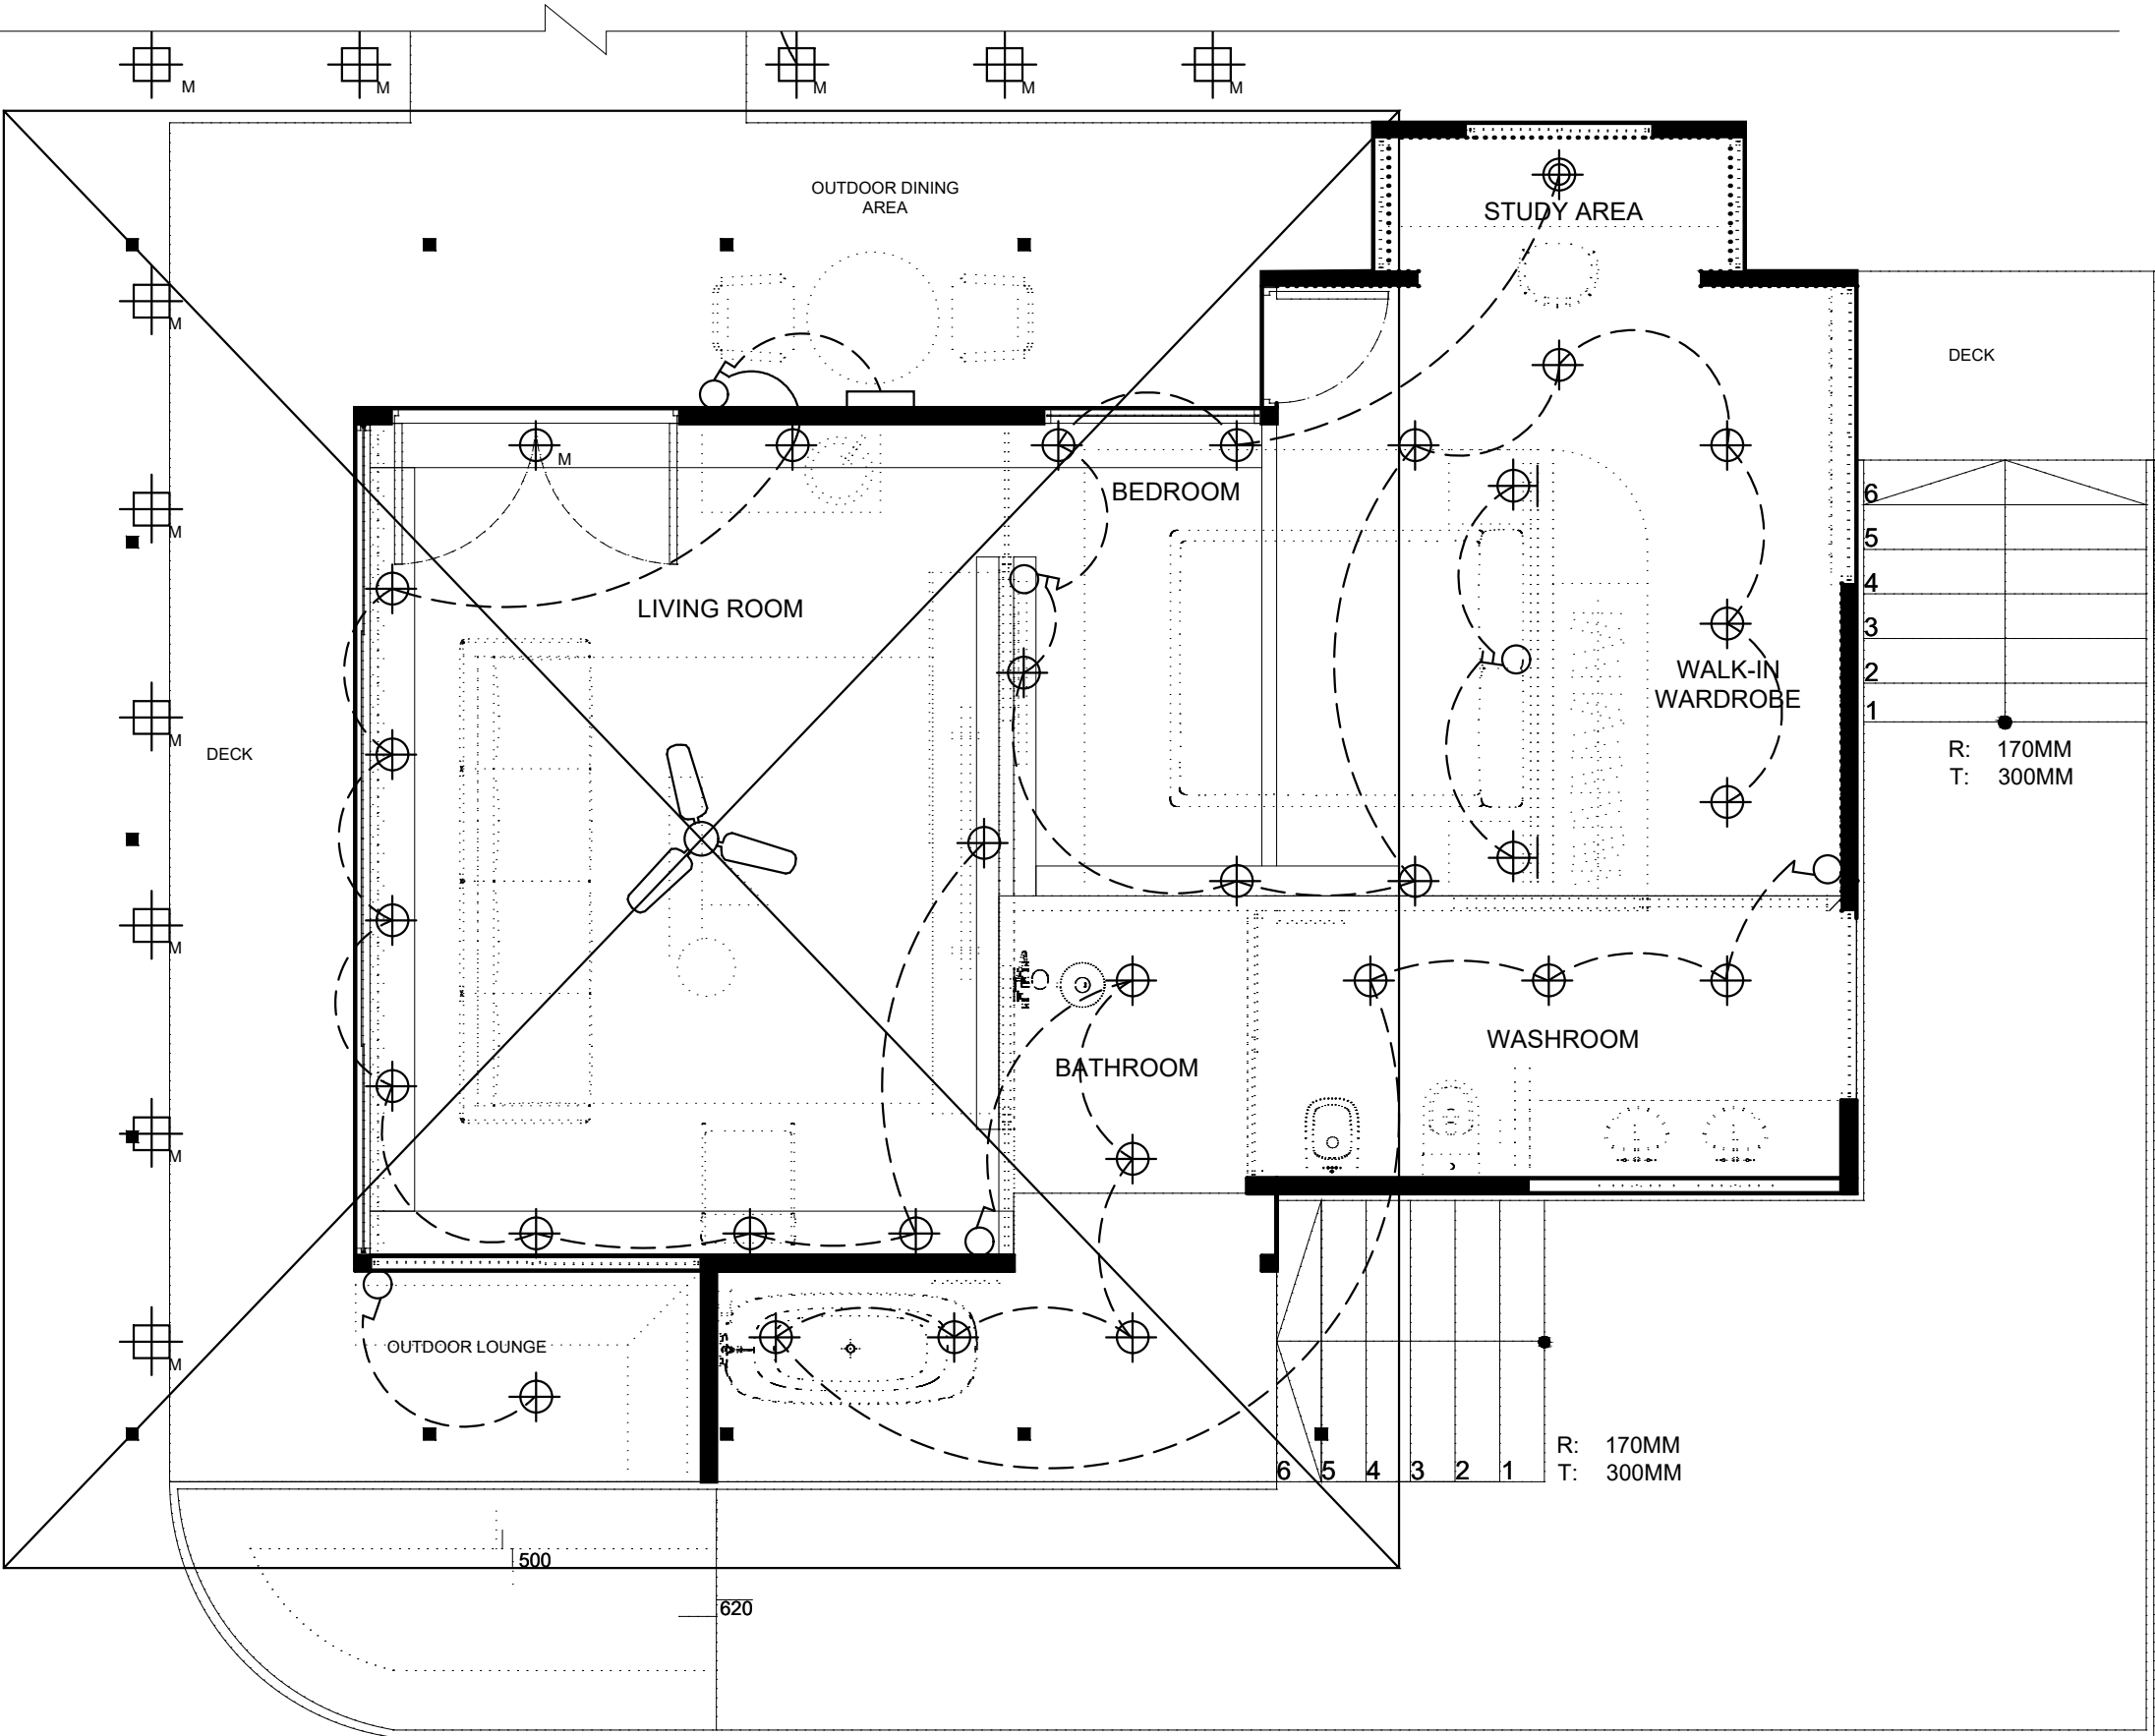


1
105

RCP-REFLECTED CEILING PLAN
SCALE : 1 : 50

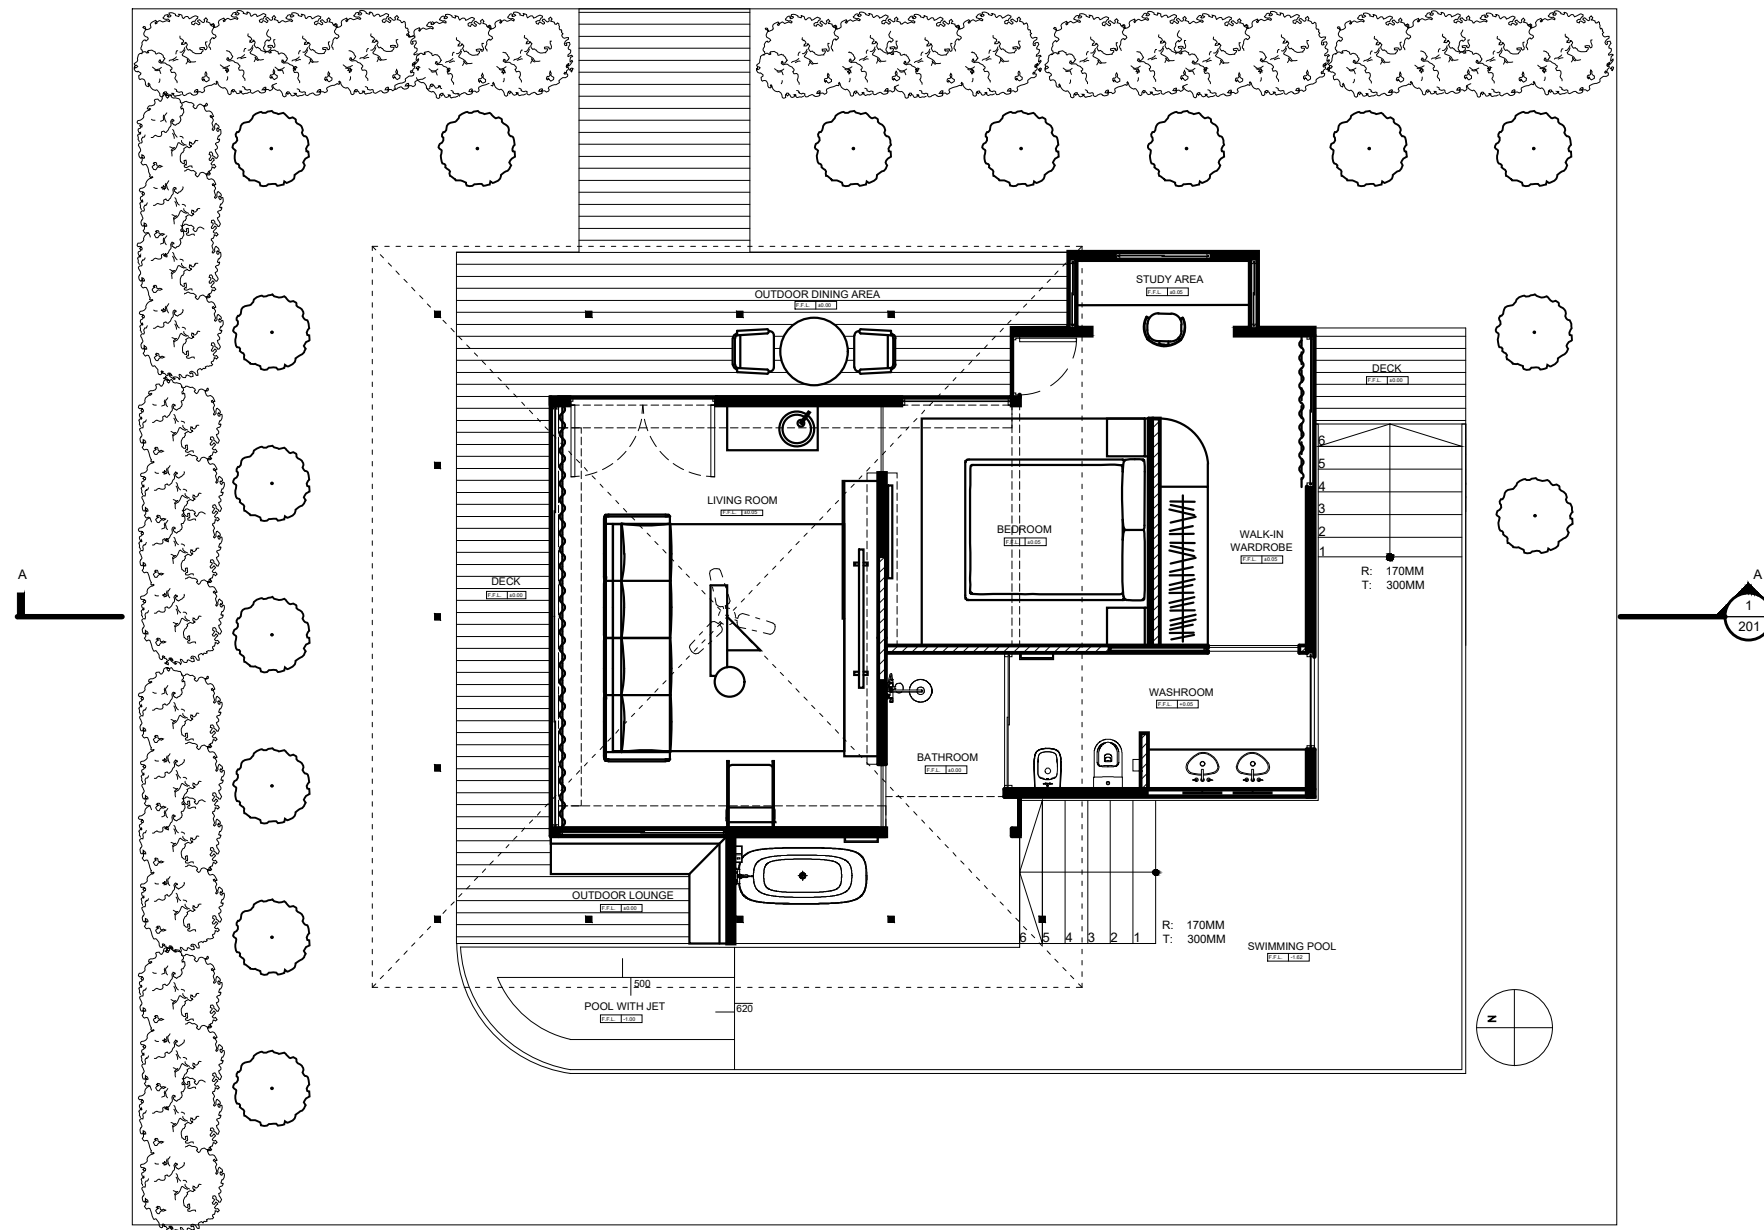


REFERENCE PLAN
SCALE : 1 : 100

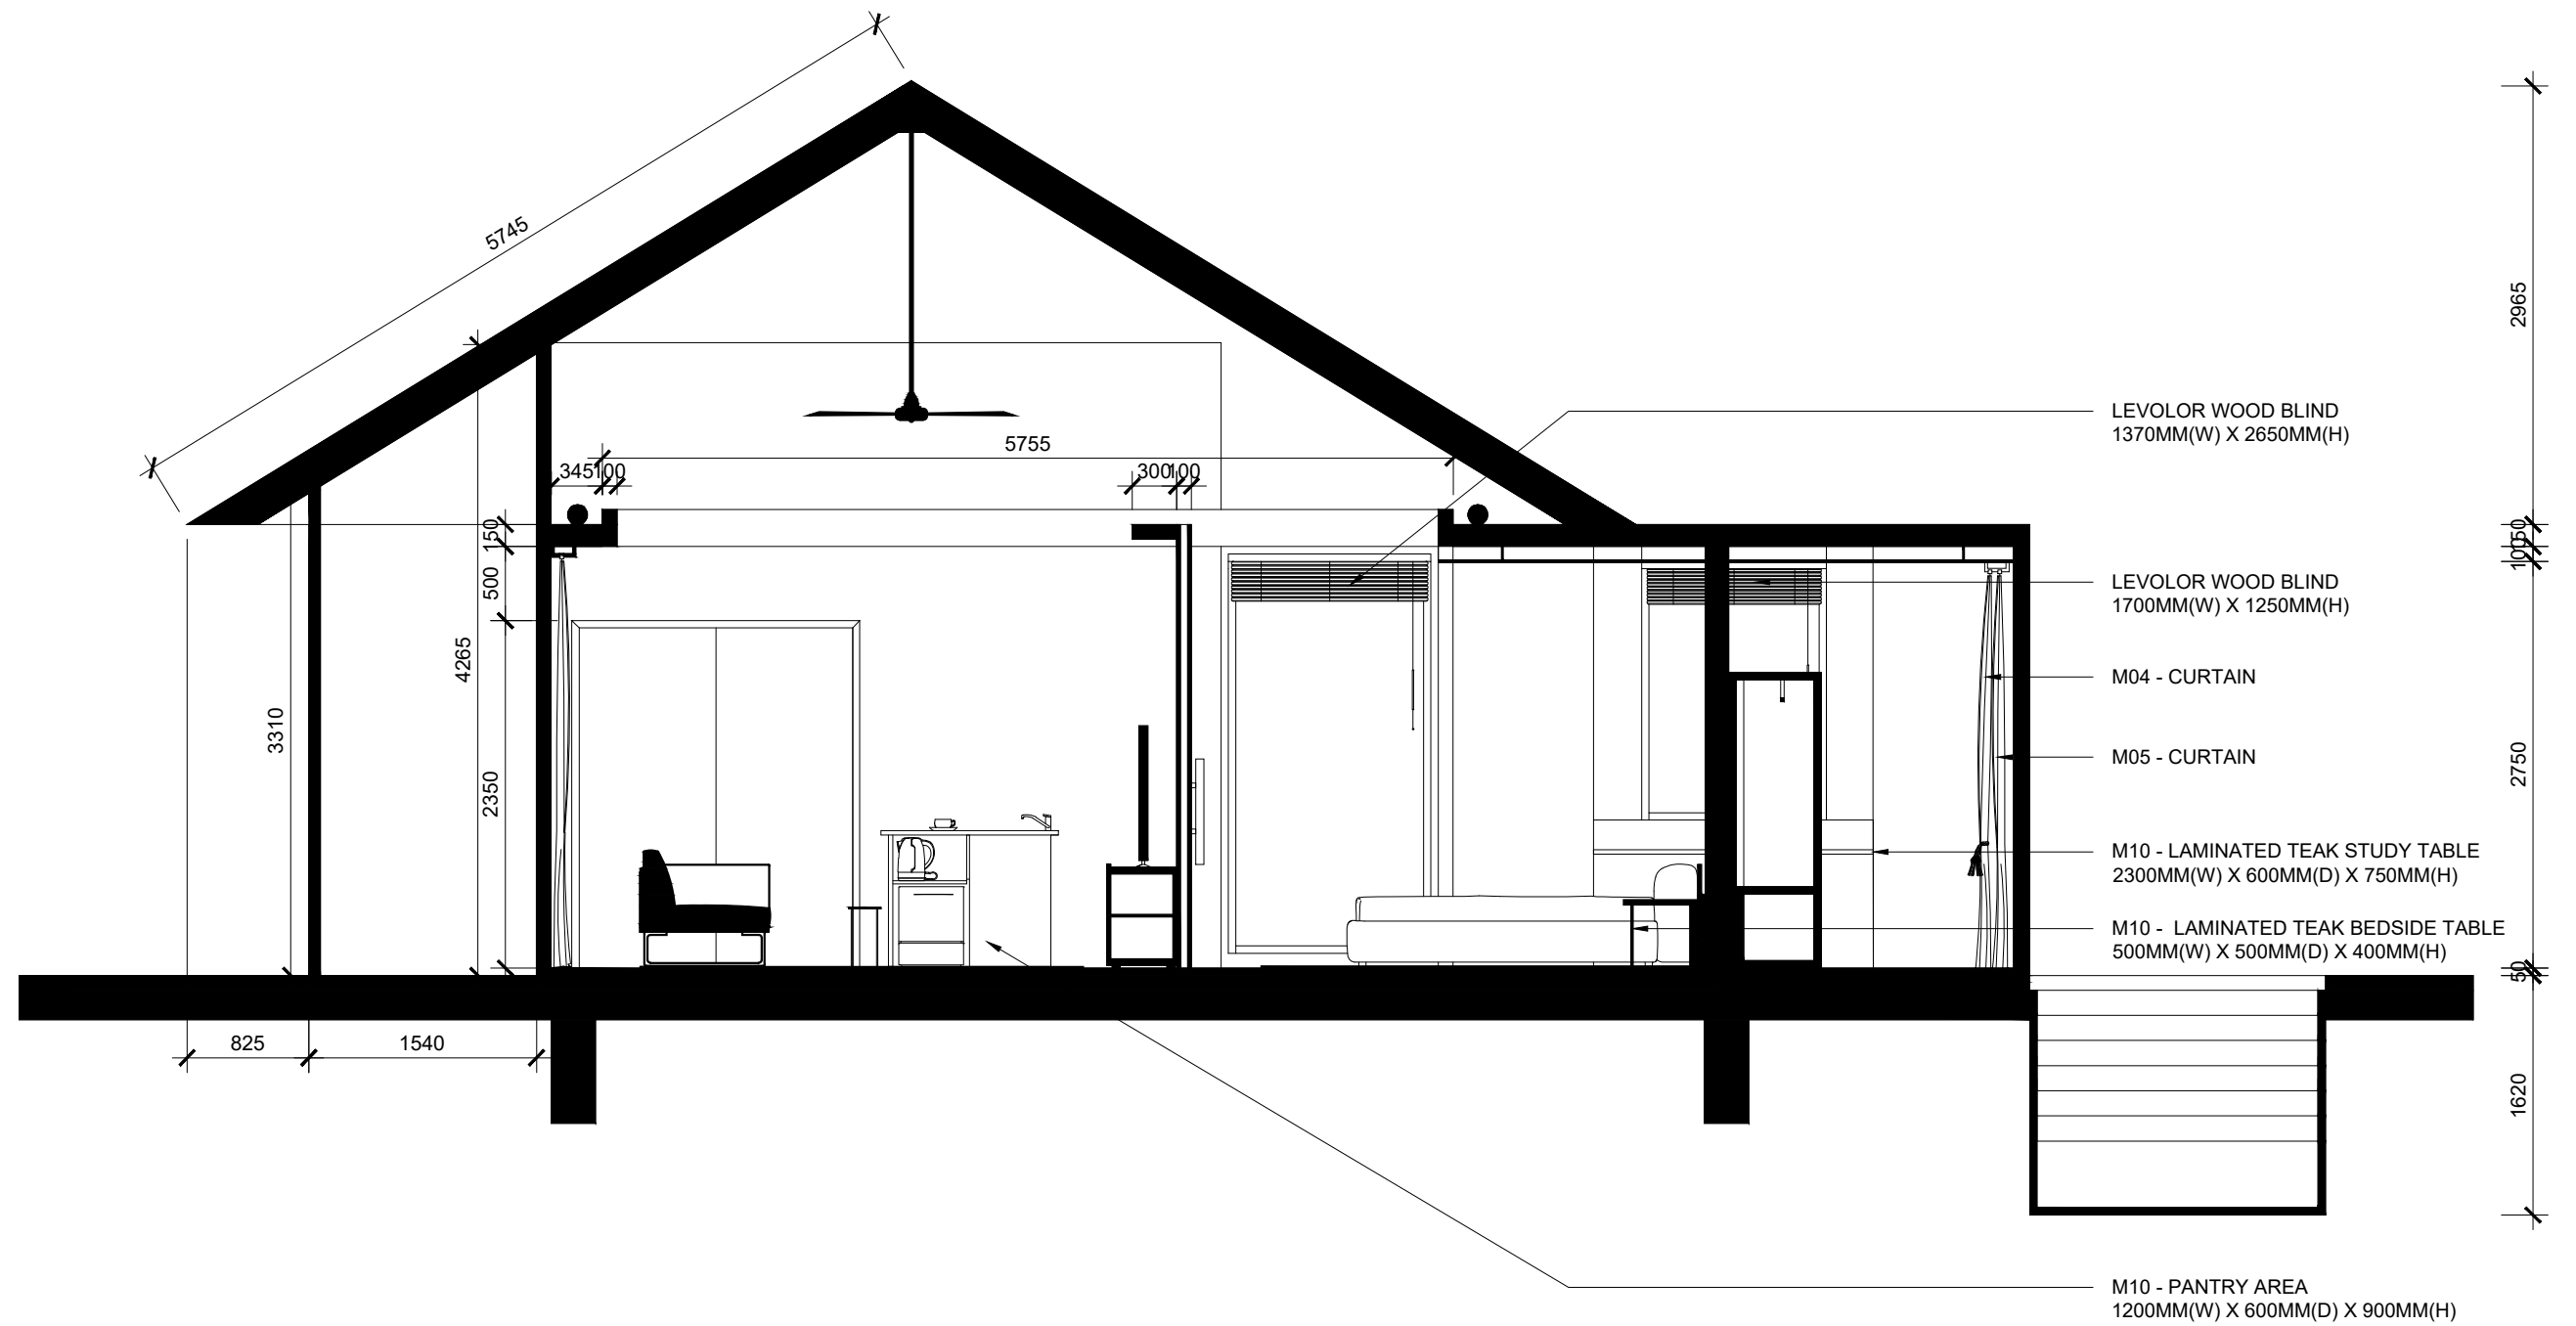


1
201

SECTION A-A

SCALE : 1 : 50

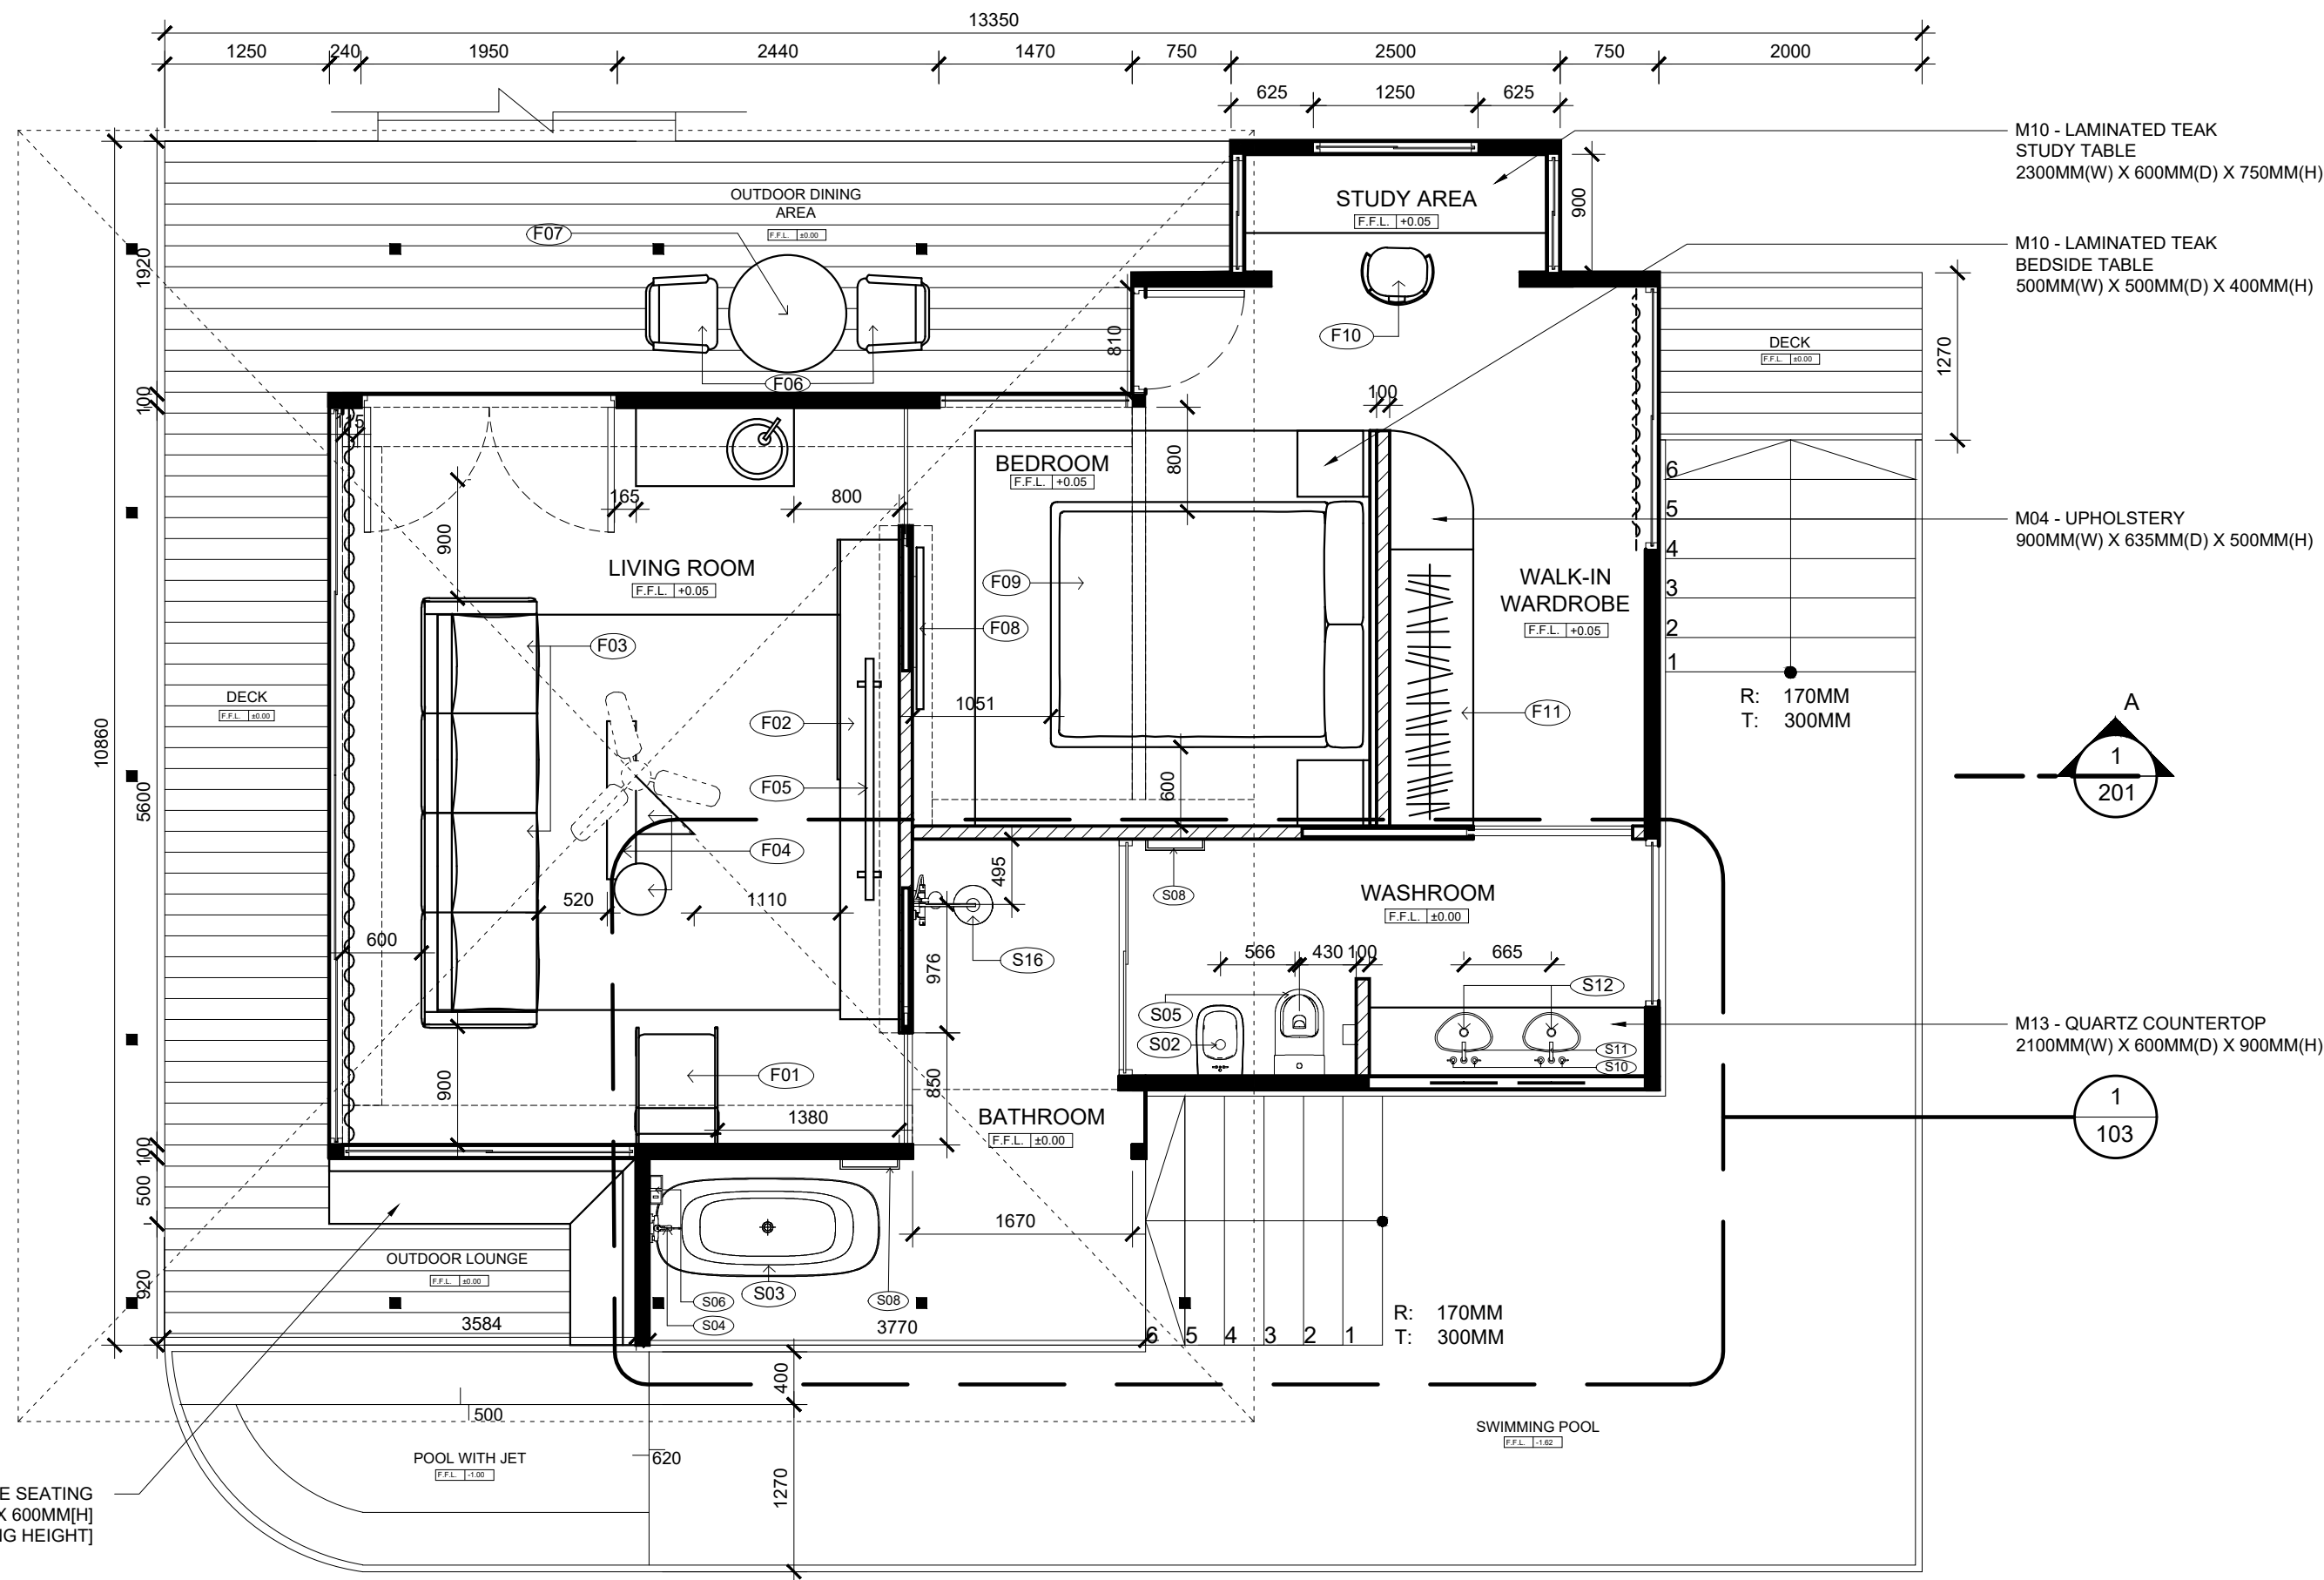

1
102 FURNITURE LAYOUT PLAN
SCALE : 1 : 50

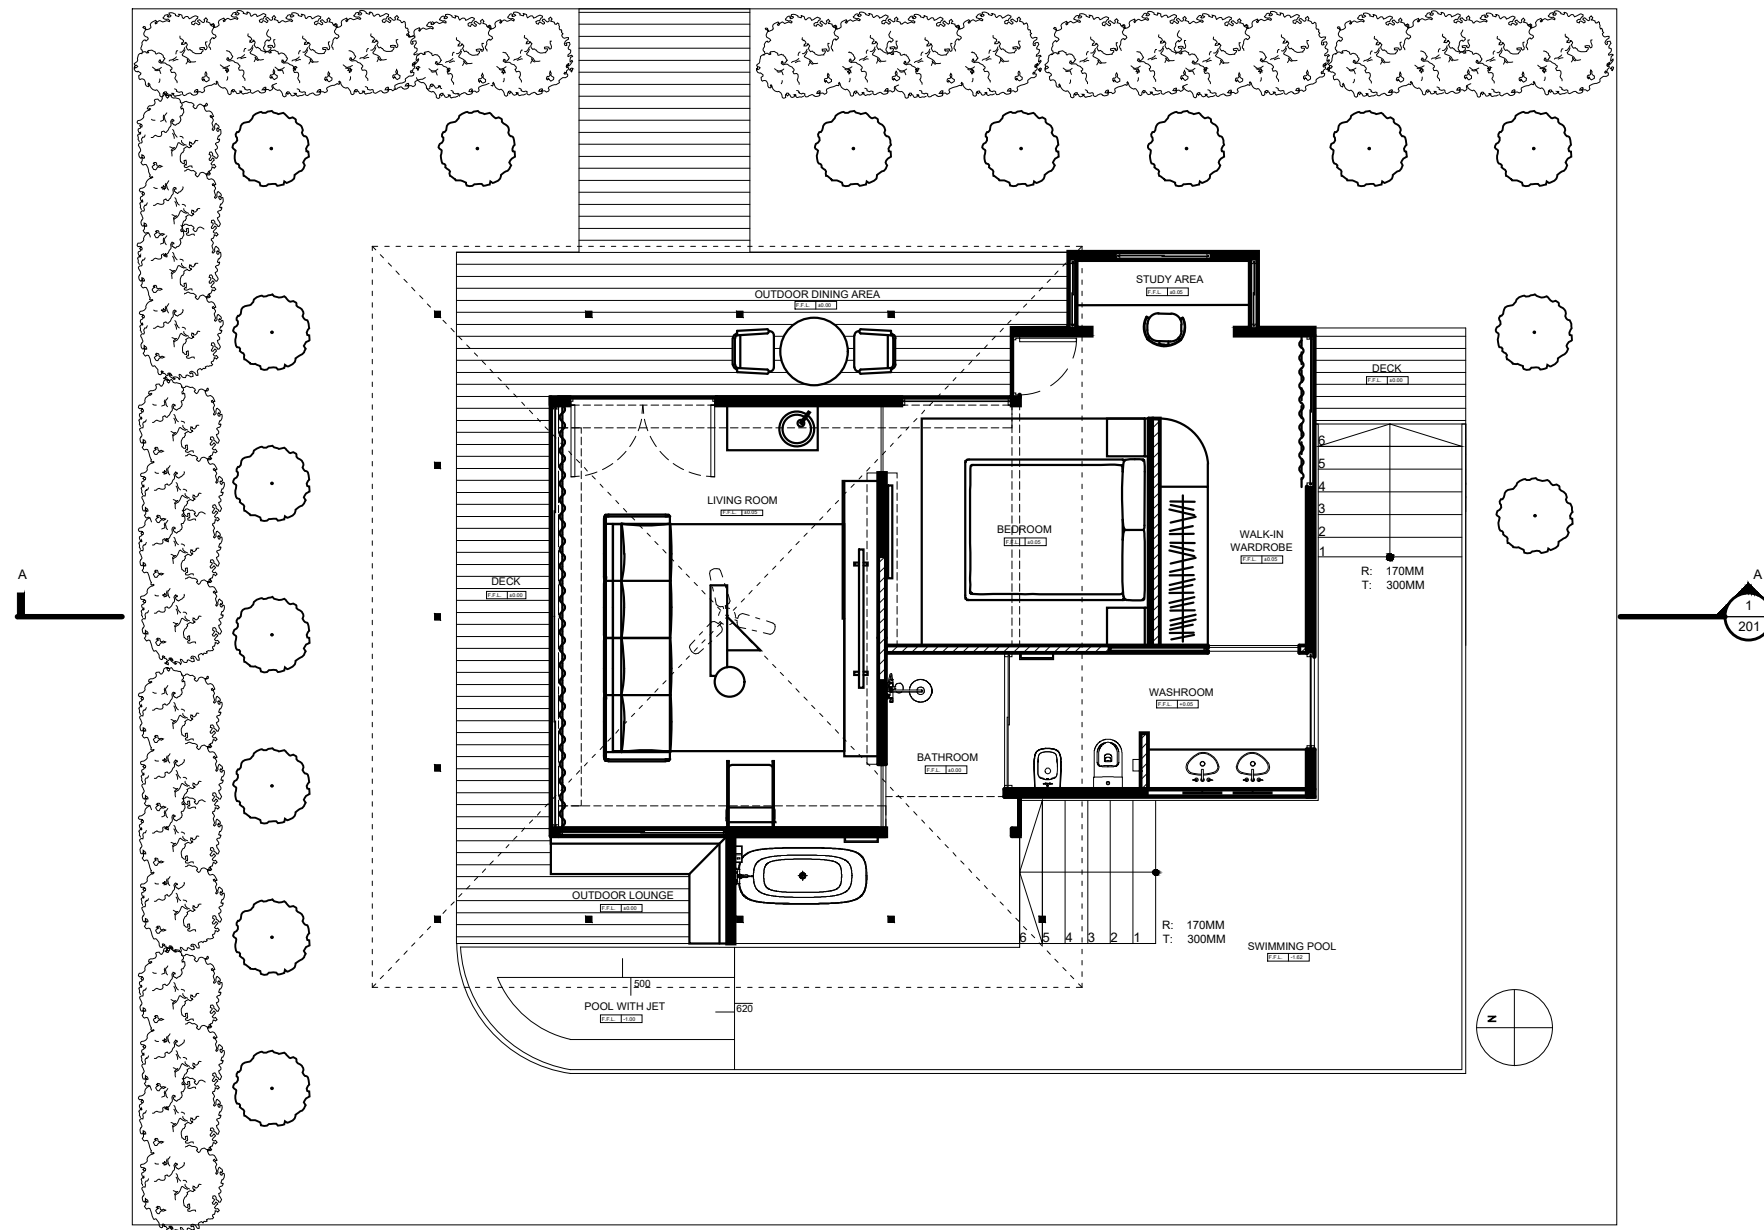

REFERENCE PLAN
SCALE : 1 : 100

